




Coupler

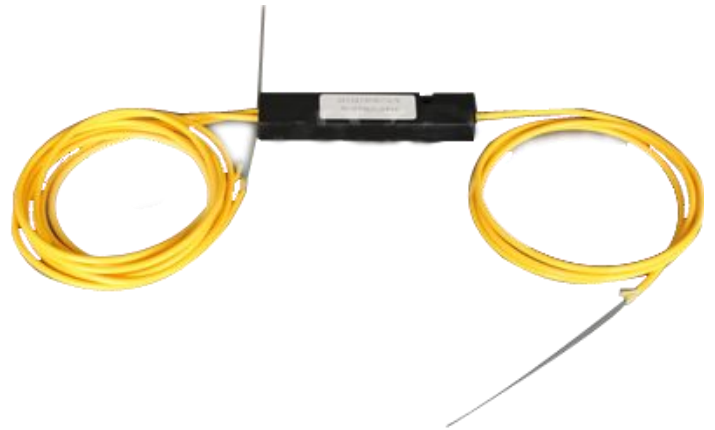

Features

- ◆ Low excess loss
- ◆ Excellent directivity
- ◆ Low polarization sensitivity
- ◆ High cost-effective
- ◆ High environmental and mechanical stability

Applications

- ◆ Fiber optical communication system
- ◆ Fiber optical sensors
- ◆ Fiber optical CATV
- ◆ LAN, WAN system



Specifications

Wavelength(nm)	850/1310/1550	
BroadBand(nm)	±20	±40
Insertion loss (dB)	≤3.3(sm)	≤7(sm)
Standard extra loss (dB)	≤0.15	
Directivity(dB)	≥60(1X2)	
Equality(dB)	0.5	
PDL Loss(dB)	≤0.1	
Operation Temperature(°C)	-40°C ~ +85°C	
Storage Temperature(°C)	-40°C ~ +85°C	
Package dimension(mm)	φ3X52or 90X20X10 240x115x18	

Ordering Information:

1. Supply SM,MM, Simplex connector
2. 1XN,2*N
3. Length of cable can be different