




DW-PC Series
Patch cord and Pigtail

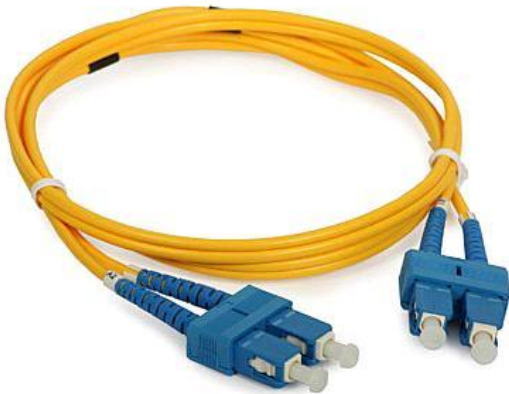

Features

- ◆ Superior qualified standard PC, APC, UPC, SPC polishing;
- ◆ 100% optic test: Insertion Loss: ≤ 0.3 (PC); ≤ 0.2 (APC); ≤ 0.2 (UPC); ≤ 0.3 (SPC);
- ◆ 100% optic test: Return Loss: ≥ 45 (PC); ≥ 60 (APC); ≥ 55 (UPC); ≥ 50 (SPC);
- ◆ $\phi 0.9\text{mm}$, $\phi 2.0\text{mm}$, $\phi 3.0\text{mm}$ fiber optic cable optional;
- ◆ Single mode (9/125) or multi mode (50/125 or 62.5/125) fiber available;
- ◆ FC, SC, ST, LC, MU, ST, MT-RJ, etc connector
- ◆ Good exchange ability and good durability;
- ◆ Available in fiber bunch, ribbon fan-out, pigtail available;
- ◆ Meets ISO9001, ROHS and Bell core GR 326-core standards;
- ◆ Customized specifications welcomed.



Application

- ◆ CATV, metro Test equipment
- ◆ Telecommunication networks;
- ◆ Local area networks (LAN);
- ◆ Wide area networks (WAN);
- ◆ Premise installations;
- ◆ Data processing networks;
- ◆ Video and military active device termination.

Specification:

Fiber Type		SM		MM	
Normal Fiber OD		125±0.2um		125±0.2um	
Connector Type		SC,FC,E-2000,LC,MU	MTRJ	SC,FC,ST,E2000,LC,MU	MTRJ
Insertion Loss(Typical)		0.2dB	0.4dB	0.2dB	0.4dB
Indertion Loss(Max)		0.3dB	0.5dB	0.3dB	0.5dB
Return Loss(Typical)	PC	50dB	35	-	-
	UPC	55dB	-	-	-
	APC	65dB	-	-	-
Mating Durability(500 C)		0.2dB			
Temperature Stability		0.3dB			
Operation Temperature		-40℃~+85℃			
Storage Temperature		-40℃~+85℃			

* For further reports, please contact us for update.

Order Information:

Part Number	Discription
DW-PCSCSC-SS-2.0-3	Patch cord,SC/PC-SC/PC,sm,simplex,2.0mm,3m
DW-PCSC-SS-0.9-1.5	Patch cord,SC/PC,sm,simplex,0.9mm,1.5m
DW-PCLCASC-MD-3.0-3	Patch cord,LC/APC-SC/PC,multimode,duplex,3.0mm,3m
.....